

BICYCLE TRAILER



USER INSTRUCTIONS

WARNING

- Never leave pets unattended.
- Always ride defensively.
- Do not exceed 88lbs(40kgs) maximum load.
- Do not exceed 10MPH(16Km/H) maximum speed..
- Ventilate during hot weather.

PRE-RIDE SAFETY CHECK

- Inspect the trailer and its parts before and after every use.
- Check to ensure hitch clamp is tight.
- Check to ensure hitch safety strap is secure.
- Inspect bike and trailer condition before each use.
- HELMETS ON! Ensure rider helmet is on and secure.
- Check TIRE AIR PRESSURE. Always maintain between 25 and 30 PSI (1.70 and 2.00 BAR).


RIDING TIPS

- Ride slower than you would if you were without the trailer.
- You will require extra stopping distance. Use your brakes early.
- Take corners very gradually.
- Use on smooth roads only. Do not ride over curbs, potholes or off road.
- Avoid riding at night.

MAIN FRAME AND SIDE PANEL ASSEMBLY

Remove trailer and all components from carton. While trailer is still in folded position, lift both side tubes to an upright position. Insert the safety pin into the holes on the two crossbars to set up the side panels. (Refer to diagram)


NOTE: Ensure that the safety pin is secured with the wrap spring clip.

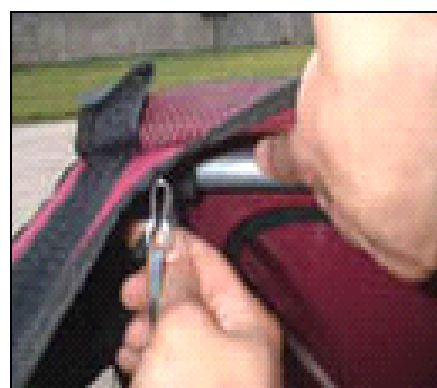

INSTALLING WHEELS

Place the wheel hub on the axle by simply pushing in the wheel until it snaps in place, so the wheel cannot be removed. Push in all the way so that the wheel cannot be pushed further(see diagram). After both wheels are assembled/attached pull on the wheels to ensure they cannot be removed. To remove the wheels, lift back of trailer up and simply push on the push buttons located on the axle and remove the wheel(see diagram).

NOTE: Check tire sidewall for proper tires inflation & check tires regularly.

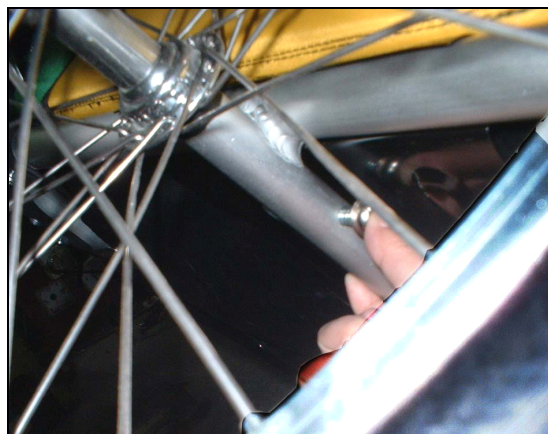

WARNING

Failure to properly and adjust wheels with quick release levers could allow wheel to come off during use. This could lead to serious injury.

HITCH ARM ASSEMBLY

Lift front of trailer up. Remove the hitch arm-locking pin from back hole in hitch arm bracket.

Fold hitch arm out until parallel with base frame and lock the hitch arm into place by re-inserting the safety pin through the front hole of hitch arm bracket and snap the safety pin.

NOTE: Ensure the safety pin is secured with the wrap spring clip.



IMPORTANT

Do not use the trailer without proper installation of the safety pin.

PUTTING THE PET INTO THE TRAILER

Open the zipper and put the pet into the trailer, then close the Velcro and the buckle.

Open the top window and make the clip on the strap through the crossbar tie the pet. Please refer to the picture.



ATTACHING TRAILER TO REAR AXLE OF BICYCLE

Fasten hitch arm onto rear axle of your bike. Wrap the safety strap around the chainstay of the bike. Snap the hook into the D-ring attached the trailer arm.

NOTE: Ensure the safety pin is secured with the wrap spring clip.



CAUTION

If the hitch interferes with your bike or other bike attachments, or if it does not tighten securely, do not use. Contact your bike dealer for help with proper installation.

INSTALL HANDLEBAR

Insert the handle bar into the base tube on the frame as shown in the below and let the hole on the handle bar aim at the hole on the base tube. Then, revolve and lock the safety pins to fix the handle bar on the base tube.



IMPORTANT

Do not use the Jogger without proper installation of the safety pin.

ATTACH THE FRONT WHEEL

Insert the front wheel into the quadrate tube on the frame and be sure to line up the holes in the frame with the holes in the front wheel set to allow the long screw to be installed. At last tighten the black knob firmly.

